BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

BYATARAYANAPURA DIVISION

Kodigehalli Sub division

Name of work:- Improvements of raods in Hoodi muniswamappa layout in ward 07, Byataryanapura, Kodigehalli sub division.

Est Cost: Rs. 40.00 Lakhs

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

NAME OF WORK:- ***Detailed Estimate for the Improvements of raods in Hoodi muniswamappa layout in ward 07, Byataryanapura, Kodigehalli sub division.***

							ESTIMATED COST		4000000.00
Sl No	Description of work	Unit	No	Length	Breadth	Depth	Quantity	Rate in Rs	Amount in Rs
1	Removing BS Slab of drain and stacking.						Sqm		
	(P.No.28, I.No.5.32 of PW,P&IWTD S.R 2013-14)								
	Main Roads								
	1st Main		1x2	173	1.65		570.90		
	2nd Main		1x2	80	1.65		264.00		
	Cross Road								
	1st cross		1x2	50	1.65		165.00		
	2nd cross		1x2	50	1.65		165.00		
	3rd cross		1x2	50	1.65		165.00		
	4th cross		1x2	50	1.65		165.00		
	5th cross		1x2	50	1.65		165.00		
	5th a cross		1x2	50	1.65		165.00		
	6th cross		1x2	20	1.65		66.00		
	6th a cross		1x2	10	1.65		33.00		
							1923.90	50.11	**96410.4768**
	Basic Rate Rs.	46.40							
	Add 8% A.W Rs.	3.71							
	Total Rate Rs.	**50.11**							
2	Refixing stone slabs of drains and pointing in CM 1:3.						Sqm		
	(P.No.28, I.No. 5.33 of PW,P&IWTD S.R 2013-14)								
			Qty Same as I.No.1 (70%)				**1346.73**	70.04	**94322.00**
	Basic Rate Rs.	64.85							
	Add 8% A.W Rs.	5.19							
	Total Rate Rs.	**70.04**							
3	Providing granite slabs of selected quality roughly dressed and fixed in cement mortar (1:6) including fixing curing etc., complete. (7.50cms thick)						Sqm		
	(P.No.28, I.No.5.31.1 of PW,P&IWTD SR 2013-14.)								
			Qty Same as I.No.1 (30%)				**577.17**	343.44	**198223.26**
	Basic Rate Rs.	318.00							
	Add 8% A.W Rs.	25.44							
	Total Rate Rs.	**343.44**							
4	KSRRB M300-2: Earth work excavation by manual means in Ordinary Soil involving an average horizontal throw up to 2mts and an average lift up to 0.5m, excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3.						Cum		
	(P.No.149, I.No.19.1 of PW,P&IWTD S.R 2013-14)								
	Main Roads								
	1st Main		1	173	12.00	0.20	415.20		
	2nd Main		1	80	8.00	0.20	128.00		
	Cross Road								
	1st cross		1	50	8.00	0.20	80.00		
	2nd cross		1	50	8.00	0.20	80.00		
	3rd cross		1	50	8.00	0.20	80.00		
	4th cross		1	50	8.00	0.20	80.00		
	5th cross		1	50	8.00	0.20	80.00		
	5th a cross		1	50	8.00	0.20	80.00		
	6th cross		1	20	8.00	0.20	32.00		
	6th a cross		1	10	8.00	0.20	16.00		
	Basic Rate Rs.	61.00					**1071.20**	65.88	**70570.66**

	Add 8% A.W Rs.	4.88								
	Total Rate Rs.	**65.88**								
5	KSRRB 300-58. Compaction of original ground with maximum of 6 passes of 8 to 10 tonnes power roller including filling in depression occuring during rolling including cost of all labour, HOM of machinery complete as per specifications. (167, I.No. 19.64)						**Sqm**			
	Main Roads									
	1st Main		1	173	12.00		2076.00			
	2nd Main		1	80	8.00		640.00			
	Cross Road									
	1st cross		1	50	8.00		400.00			
	2nd cross		1	50	8.00		400.00			
	3rd cross		1	50	8.00		400.00			
	4th cross		1	50	8.00		400.00			
	5th cross		1	50	8.00		400.00			
	5th a cross		1	50	8.00		400.00			
	6th cross		1	20	8.00		160.00			
	6th a cross		1	10	8.00		80.00			
	Basic Rate	**3.75**					**5356.00**	**4.05**	**21691.80**	
	Area Weightage @ 8%	**0.30**								
	Total	**4.05**								
6	KSRRB M400-17. Providing, laying, spreading and compacting graded stones aggregate to wet mix macadam specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications. (P. 166, Item No. 20.18)						**Cum**			
	Main Roads									
	1st Main		1	173	12.00	0.20	415.20			
	2nd Main		1	80	8.00	0.20	128.00			
	Cross Road									
	1st cross		1	50	8.00	0.20	80.00			
	2nd cross		1	50	8.00	0.20	80.00			
	3rd cross		1	50	8.00	0.20	80.00			
	4th cross		1	50	8.00	0.20	80.00			
	5th cross		1	50	8.00	0.20	80.00			
	5th a cross		1	50	8.00	0.15	60.00			
	6th cross		1	20	8.00	0.15	24.00			
	6th a cross		1	10	8.00	0.15	12.00			
	Basic Rate Rs.	1038.00					**1039.20**	**1121.04**	**1164984.77**	
	Add 8% A.W Rs.	83.04								
	Total Rate Rs.	**1121.04**								
7	KSRRB M500-6. Providing and applying primer coat with bitumen emulsion on prepared surface of granular base including clearing of road surface and spraying primer at the rate of 0.60 kg / sqm using mechanical means complete as per specifications. (P. 171, Item No. 21.6)						**Sqm**			
	Main Roads									
	1st Main		1	173	12.00		2076.00			
	2nd Main		1	80	8.00		640.00			
	Cross Road									
	1st cross		1	50	8.00		400.00			
	2nd cross		1	50	8.00		400.00			
	3rd cross		1	50	8.00		400.00			
	4th cross		1	50	8.00		400.00			
	5th cross		1	50	8.00		400.00			
	5th a cross		1	50	8.00		400.00			

	6th cross		1	20	8.00		160.00		
	6th a cross		1	10	8.00		80.00		
	Basic Rate Rs.	41.00					**5356.00**	44.28	**237163.68**
	Add 8% A.W Rs.	3.28							
	Total Rate Rs.	**44.28**							
8	KSRRB M500-18. Providing and laying semi dense bituminous concrete 25 mm thick with 100-120 TPH batch type HMP producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 4.5 to 5% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MORTH specification clause No. 500.8 complete in all respects as per specifications. with 80/100 grade bitumen using 40-60 HMP using mechanical paver (P. 174, Item No. 21.20.5						**Cum**		
	Main Roads								
	1st Main		1	173	12.00	0.025	51.90		
	2nd Main		1	80	8.00	0.025	16.00		
	Cross Road								
	1st cross		1	50	8.00	0.025	10.00		
	2nd cross		1	50	8.00	0.025	10.00		
	3rd cross		1	50	8.00	0.025	10.00		
	4th cross		1	50	8.00	0.025	10.00		
	5th cross		1	50	8.00	0.025	10.00		
	5th a cross		1	50	8.00	0.025	10.00		
	6th cross		1	20	8.00	0.025	4.00		
	6th a cross		1	10	8.00	0.025	2.00		
	Basic Rate Rs.	9069.00					**133.90**	9794.52	**1311486.23**
	Add 8% A.W Rs.	725.52							
	Total Rate Rs.	**9794.52**							
9	KSRB 2-2.1 : Earthwork excavation for foundation of buildings, culverts, water supply, sanitary lines and electrical conduits either in pits or in trenches 1.5m and above in width, in ordinary soil not exceeding 1.5 m. in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50 m. after breaking of clods complete as per specifications, specification No. KBS 2.1(a) / 2.3.5 (P. 5, I.No. 2.3) SR-2013-14						Cum		
	C.D.2 No		2	8.00	1.80	0.90	25.92		
							25.92	144.72	**3751.14**
	Basic Rate	134.00							
	Area Weightage @ 8%	10.72							
	Total	**144.72**							
10	KSRB 4-1.2: Providing and laying in position plain cement concrete of I mix M10 With OPC cement @ 220 Kgs with 40mm and down size graded granite metal coarse aggregates @ 0.892 cum and fine aggregates @ 0.465 cum machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2 (P. 12, I.No. 4.2) SR-2013-14						Cum		
	C.D.2 No		2	8.00	1.80	0.90	25.92		
							25.92	4639.68	**120260.51**
	Basic Rate	4164.00							
	Add Differnce in Cost of Cement	132.00							
		4296.00							
	Area Weightage @ 8%	343.68							
	Total	**4639.68**							

11	KSRB 5.2-3 : Providing and constructing granite / trap / basalt size stone masonry in foundation with cement mortar 1:6, stone hammerd dressed in courses not less than 20 cms high, bond stones at two m. apart in each course including cost of materials, labour, curing complete as per specifications.KBS 5.1.13 (P. 25, I.No. 5.6) SR-2013-14						Cum		
	C.D.2 No		2x2	8.00	0.60	0.60	11.52		
							11.52	3588.84	**41343.44**
	Basic Rate	3287.00							
	Add Differnce in Cost of Cement	36.00							
		3323.00							
	Area Weightage @ 8%	265.84							
	Total	**3588.84**							
12	KSRB 4-6.1 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for foundations, footings, bases of columns for mass concrete including cost of all materials, labour complete as per specificaitons. Specification No. KBS 4.6.2 (P 16, I.No 4.28) SR-2013-14						Sqm		
	C.D.2 No		2	8.00	0.60		9.60		
	Side		10	6.00	0.23		13.80		
			10	1.80	0.23		4.14		
							27.54	224.64	**6186.59**
	Basic Rate	208.00							
	Area Weightage @ 8%	16.64							
	Total	**224.64**							
13	KProviding and laying cement concrete using 20mm and down size granite jelly of ready mix concrete for RCC works laid in 15 cm thick layers and well compacted including vibrating curing etc., including smooth finish in CM 1:3, with all lead and lift etc., complete. (exculsive of cost of steel, fabrication and plastering charges)Ready mixed Cement concrete for Beams, Columns, Staircase and Roof with M-20 (1:1.5:3) (Cement-3320Kg/cum) (P. 19, I.No. 4.49.1) SR-2013-14						Cum		
	C.D.2 No		2	8.00	1.80	0.23	6.62		
							6.62	6675.48	**44218.38**
	Basic Rate	5989.00							
	Add Differnce in Cost of Cement	192.00							
		6181.00							
	Area Weightage @ 8%	494.48							
	Total	**6675.48**							
14	KSRB 4.9.2 : Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. (P. 19, I.No. 4.46) SR-2013-14						Qtl		
	C.D.2 No		2	8.00	1.80	0.23	6.62		
							6.62		
	12.83x80Kg/Cum						**529.92**		
							5.29	7380.72	**39044.01**
	Basic Rate	6834.00							
	Area Weightage @ 8%	546.72							
	Total	**7380.72**							
15	KSRB 15.1.3 – do – Providing ruled pointing to coursed stone masonry with cement mortar 1:3, 20mm deep, after raking joints to depth of 20mm nicely lining, including cost of materials, labour, curing complete as per specifications. (P.119,I.No. 15.3) SR-2013-14						Sqm		
	C.D.2 No		2	8.00		0.60	9.60		
							9.60	79.92	**767.23**
	Basic Rate	74.00							

	Area Weightage @ 8%	5.92							
	Total	**79.92**							
16	Lead for Disposal of Debris shall be payable at carage rates by Mechanical means inlcuding loadin nd unloading. From 0.00 to 5.00 Km (Page No.141)							Cum	
	Basic rate for haulage of materials as per item no.17.4 page 141) Rs. 2.00								
	Average weight of earth 1.28 tonne		Qty vide Item No.4			--	**900.00**	72.71	**65435.00**
	Basic Tate Lead Charges upto 2.00 Kms	62.20							
	2x1.28x2 =	5.12							
	Loading and unloading	67.32							
	Average Weight of earth 1.28 tone/kg for 6x1.20x2.00=12.00	5.39							
		72.71							
17	KRIDL CHARGES 11%								**440000.00**
18	Third party inspection charges 1%								**40000.00**
19	Miscelleneous & Rounding off								4140.84
								Toatl Rs.	**4000000.00**
	(Rupees:- Forty Lakhs Only)								

Technical Sanction for Rs 40.00 lakhs
Fourty lakhs only
P-2178
Registered as EE No. Dated Subject to conditions contained enclosed memo.
934/13-14 Dt. 26/12/13
AE/JE EE (BTP Div.)

CERTIFICATE:

1 The work spot has been inspected me and the work is found to be necessary.
2 The estimate is prepared as per PW, P&IWTD S.R Bangalore circle for the year 2013-2014.
3 The Provisions made in the estimate are quite necessary and adequate.
4 The area comes with in the BBMP limits.

Junior Engineer
Ward No. 07

Assistant Executive Engineer
Kodigehalli Sub Division
BBMP
ಬೆಂಗಳೂರು – 560092

Executive Engineer
Byatarayanapura Division
BBMP

ADMINISTRATIVELY SANCTIONED FOR Rs 40.00 lakhs
Rupees Fourty lakhs only
Under P-2178
Registered as EE ( ) No.
Subject to conditions c
enclosed memo EE ( ) No.
Dt. Estimate
Adl comm(Y)/AS/711/13-14
dated 23/12/13 Rs 40.00 lakhs

Adl Commissioner
(Yelahanka Zone)
BBMP, Bengaluru-92

NAME OF WORKS: Construction of C.C Road with L shape B.S. slab drains in ward no 7 Byatarayanapura

Construction of L-shape C.C. Roads.

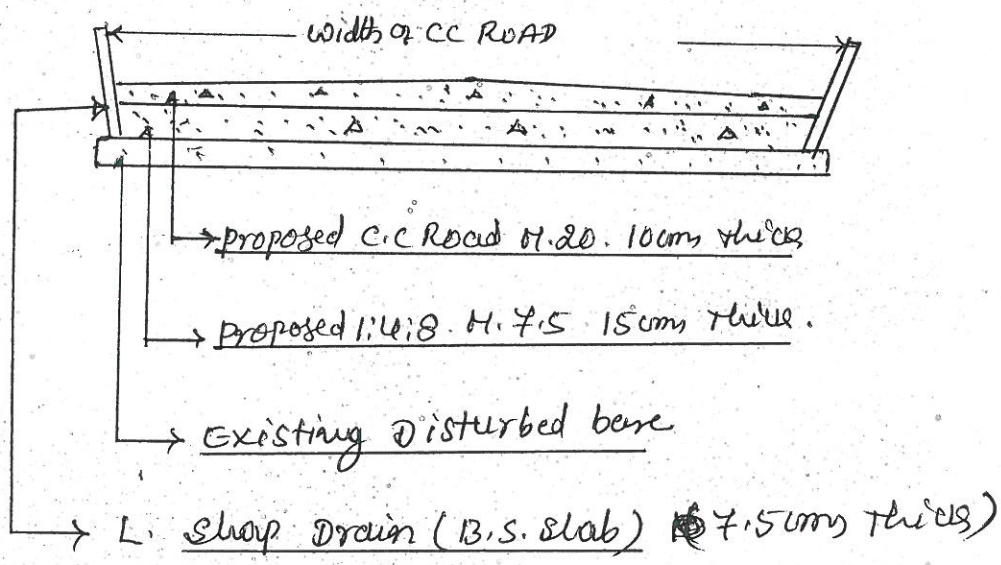
Width of CC ROAD
proposed C.C Road M.20. 10cms thick
Proposed 1:4:8 M.7.5 15cms thick.
Existing Disturbed bare
L. shape Drain (B.S. slab) (7.5cms thick)

Bly JE W.7

Assistant Executive Engineer,
Kodigehalli Sub Division,
Yelahanka Zone, B.B.M.P.,
Bangalore.

Asphalting Road.

NAME OF WORKS :- Proposed Asphalting of Roads in.....

.....

ward No 7 Byatarayanapura.

CROSS SECTIONAL DETAILS OF CONSTRUCTION OF ASPHALTING ROADS

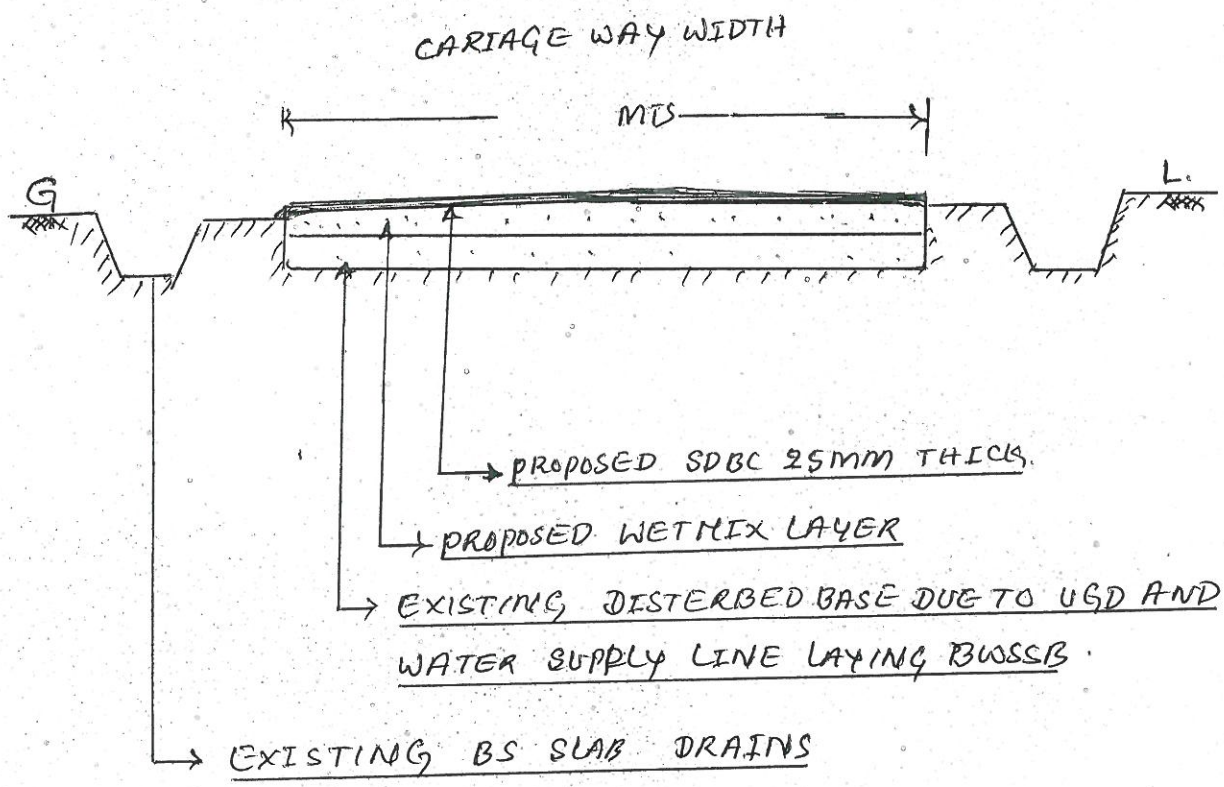

JE

Assistant Executive Engineer,
Kodigehalli Sub Division,
Yelahanka Zone, B.B.M.P.,
Bangalore.

NAME OF WORKS: Construction of Size Stone Masonary Culverts (RCC Duels) in ward no 7. Byatarayanapura.

CONSTRUCTION OF SSM CULVERTS. CROSS SECTIONAL DETAILS.

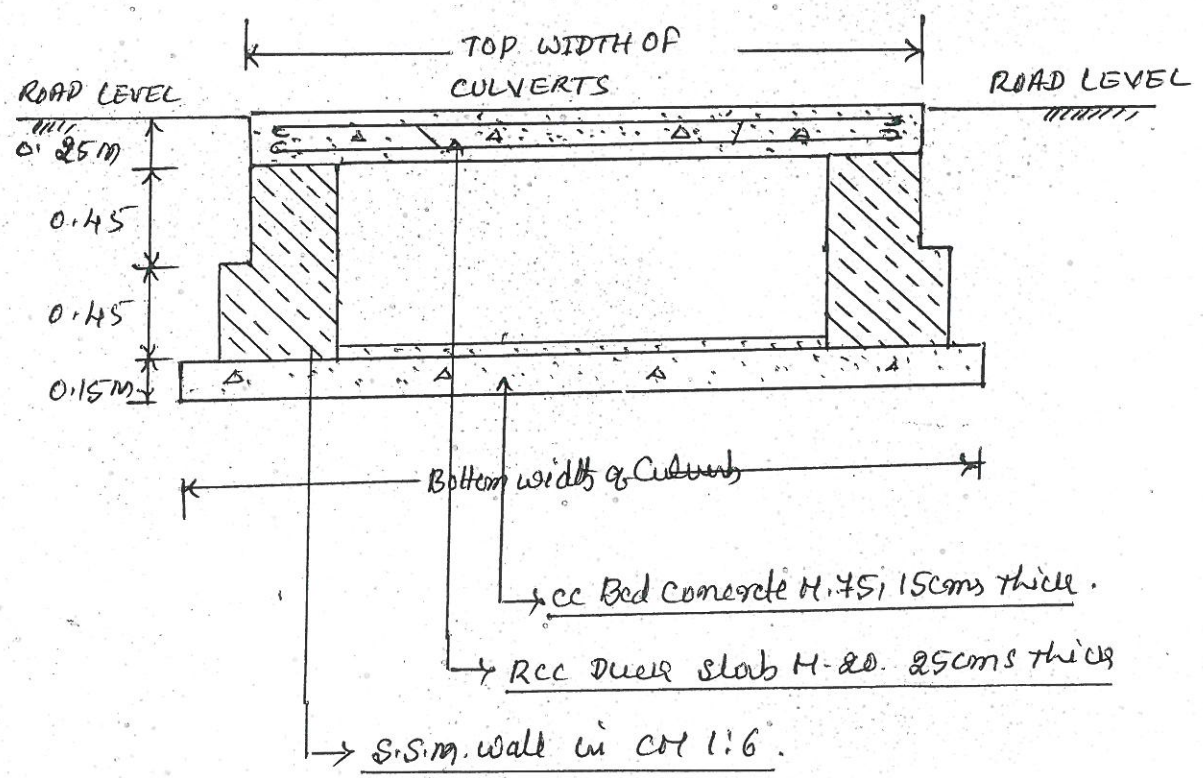

Assistant Executive Engineer,
Kodigehalli Sub Division,
Yelahanka Zone, B.B.M.P.,
Bangalore.

BRUHATH BANGALORE MAHANAGAR PALIKE

Yelahanka Zone - Byatarayanapura Sub-division

Ward No. 7 - Byatarayanapura

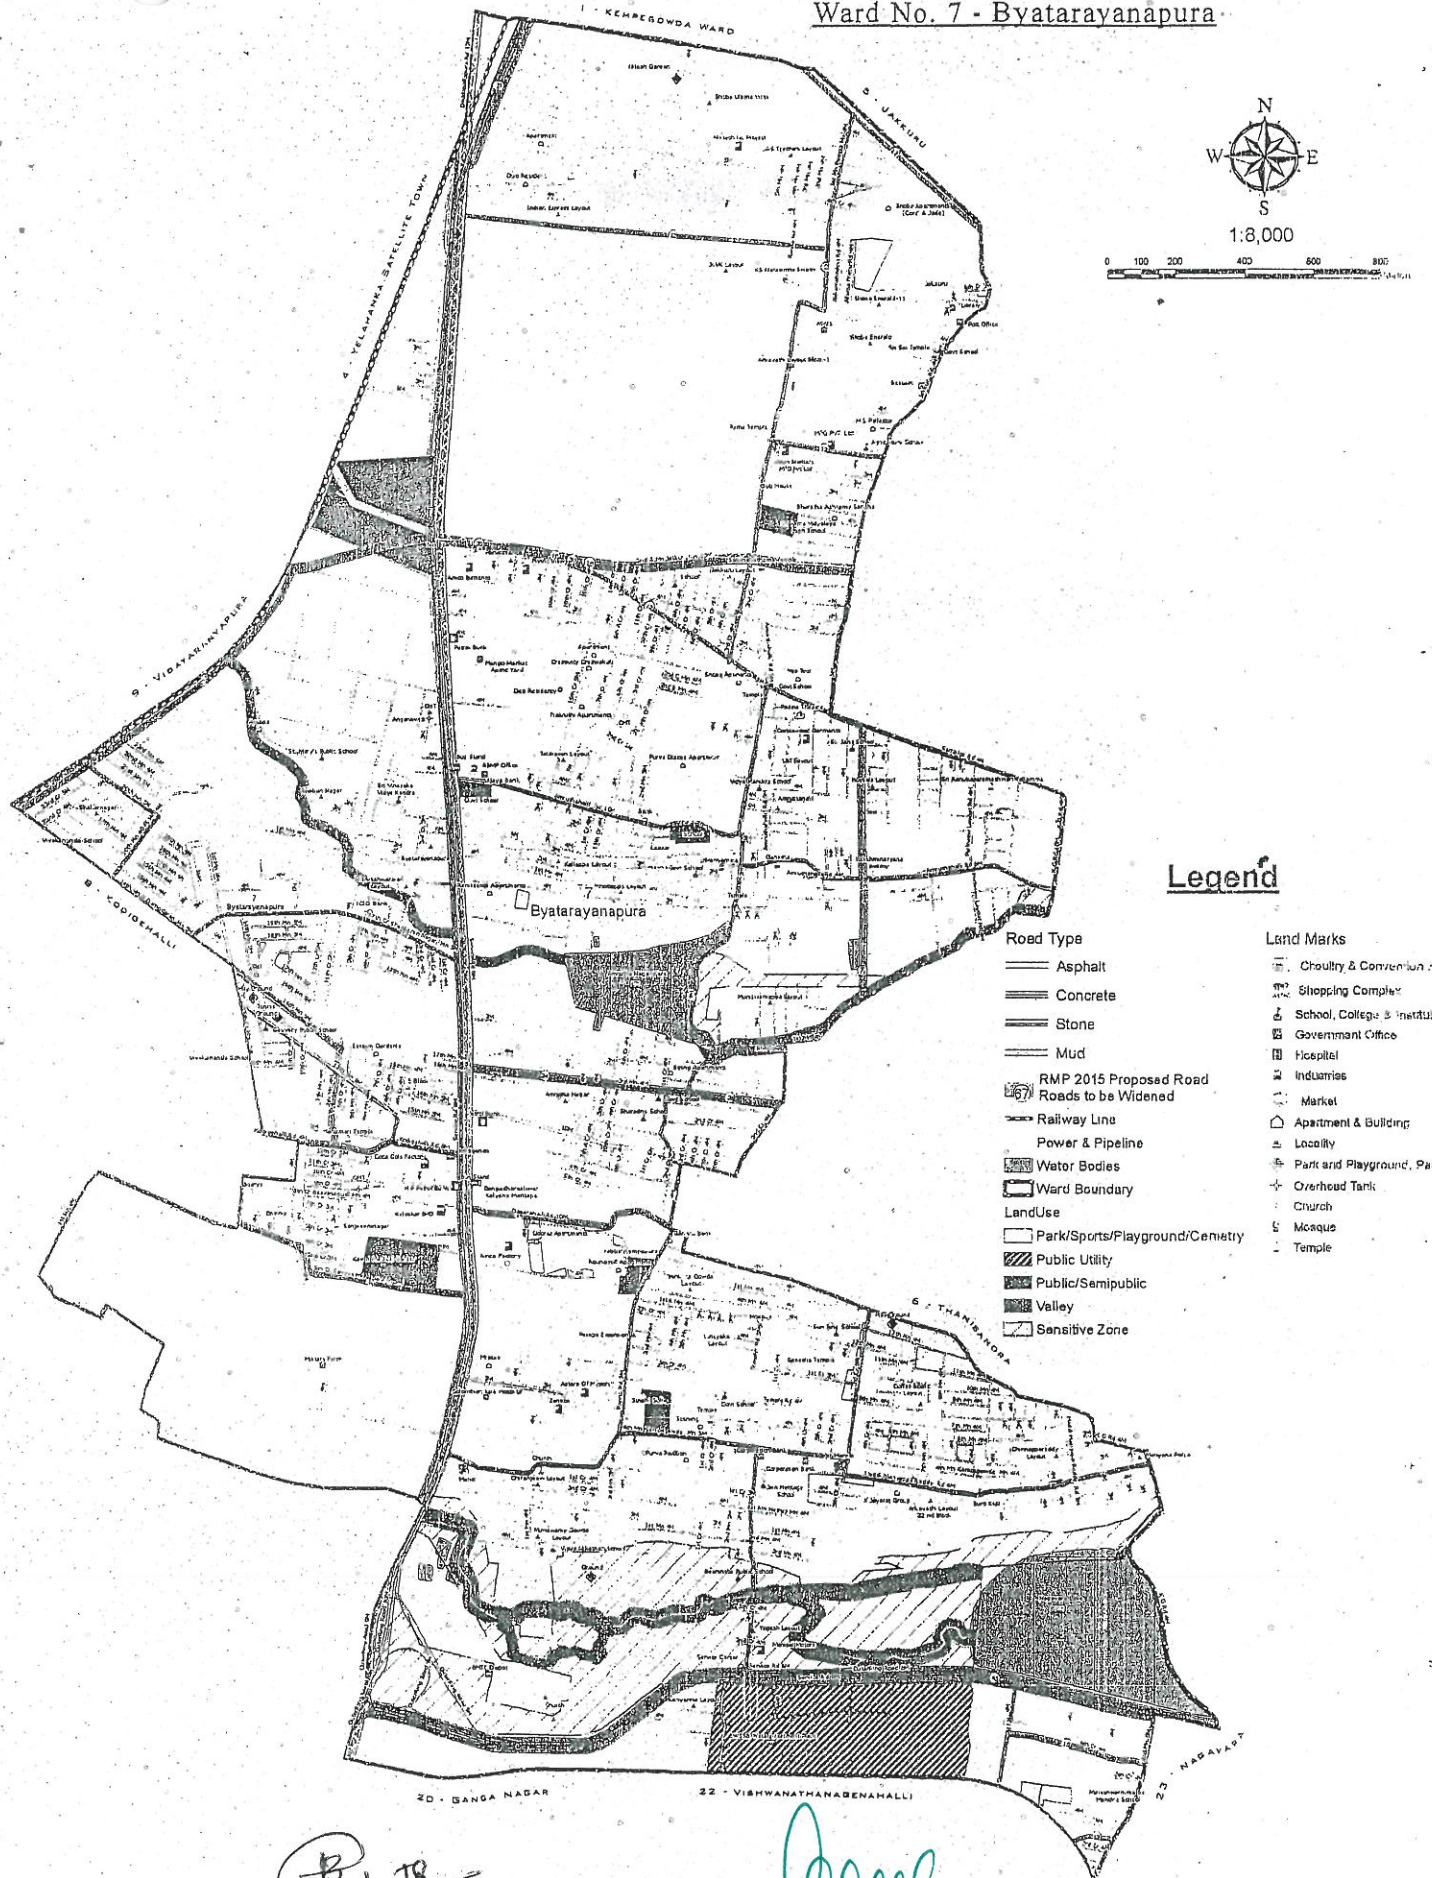

Mapped by :

SKYGROUP & CURIPe
GIS Consultants & Services
Mob no : +91-9880435939
Web : www.skygroup.co.in

AREA: 9.60 Sq Kms

Assistant Executive Engineer,
Kodigehalli Sub Division,
Yelahanka Zone, B.B.M.P.,
Bangalore.